




DAS SYSTEM




OFFICE OR LIVING

Laptop or PC

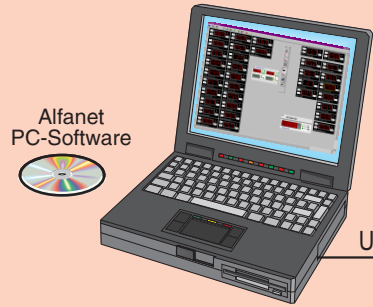

Alfanet PC-interface USB

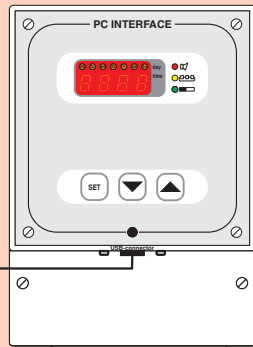


USB cable

Supply 230Vac
2-wire (L/N)



CONTROL ROOM


Smartline

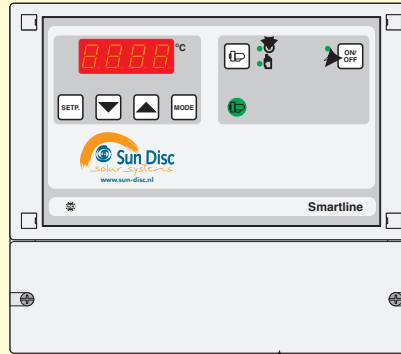

T2: SM811
2-wire shielded
T1: SM811
2-wire shielded
IN1: contact input
2-wire shielded
Supply 230Vac
3-wire (L/N/PE)
Pump out 230Vac
3-wire (L/N/PE)

RS485
3-wire shielded

RS485+Supply
4-wire shielded




Supply 230Vac
3-wire (L/N/PE)

L1: analog input
3-wire shielded
T3: SM811
2-wire shielded

POOL / OUTSIDE


Collector sensor
Pool sensor
Level detector
SunDisc Pump

Remote display

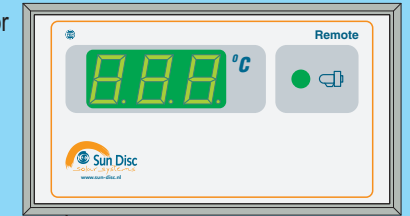

Light sensor
Converter Pyranometer
Outside sensor



Slimline

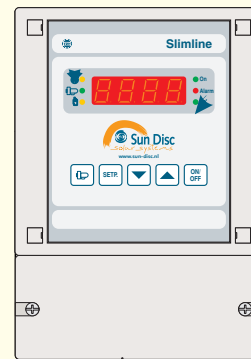

T2: SM811
2-wire shielded
T1: SM811
2-wire shielded
Supply 230Vac
3-wire (L/N/PE)
Pump out 230Vac
3-wire (L/N/PE)
RS485+Supply
4-wire shielded

Collector sensor
Pool sensor
SunDisc Pump

Remote display

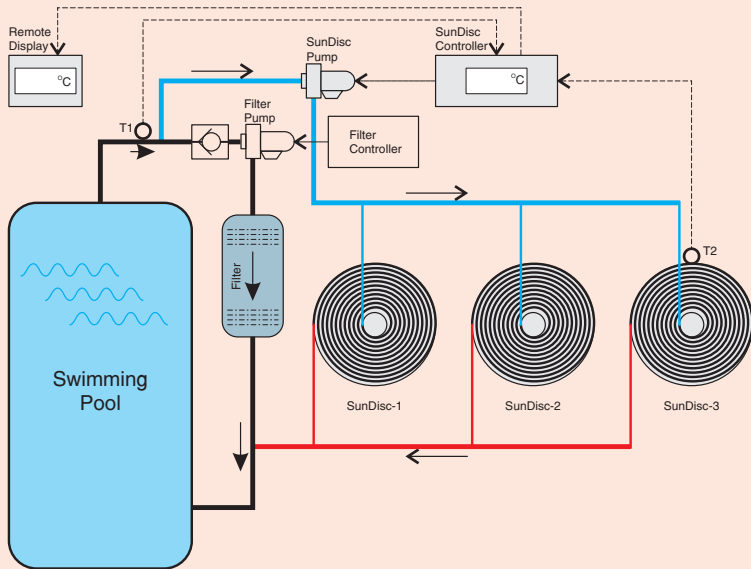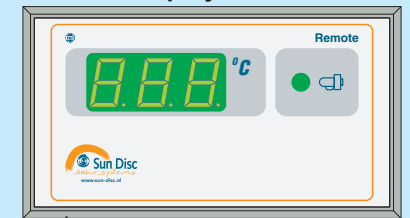

SunDisc Solar System